


NO.	DESCRIPTION OF REVISIONS	MADE BY	DATE
1	RE-ISSUE	L. LOPEZ	2/02
2			
3			
4			


GUIDE SIGN POST SPACING (Not for use with Warning, Regulatory or Marker Panels)

Panel Width	3'	4'	5'	6'	7'	8'	9'	10'
Two Posts Spacing (A)	1'-10"	2'-4"	3'-0"	3'-8"	4'-2"	4'-10"	5'-4"	6'-0"
Bolts to Panel (per Stringer)	—	—	3	3	3	3	4	4
Length of each Stringer	—	—	4'-0"	4'-8"	5'-2"	5'-10"	6'-4"	7'-0"
Three Posts Spacing (B)	—	—	1'-9"	2'-1"	2'-5"	2'-10"	3'-2"	3'-6"
Bolts to Panel (per Stringer)	—	—	3	3	3	4	4	4
Length of each Stringer	—	—	4'-6"	5'-2"	5'-10"	6'-8"	7'-4"	8'-0"

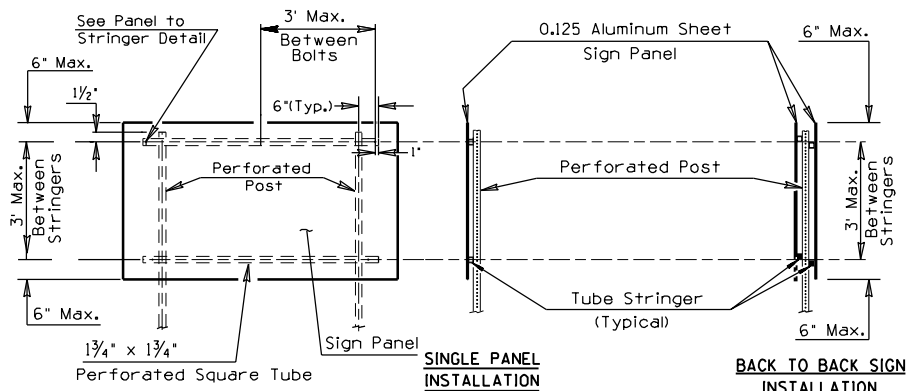


STRINGER DETAILS FOR GUIDE SIGNS (5 FT. - 10 FT. WIDE)

TOP VIEW

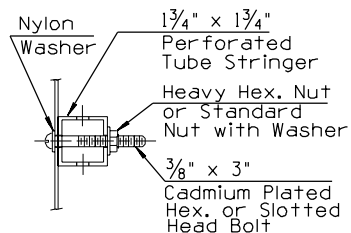


PANEL TO STRINGER OR POST CONNECTION

SIDE VIEW

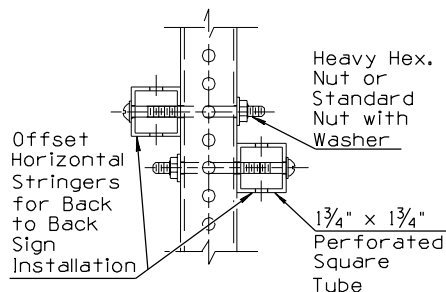

STRINGER TO POST CONNECTION

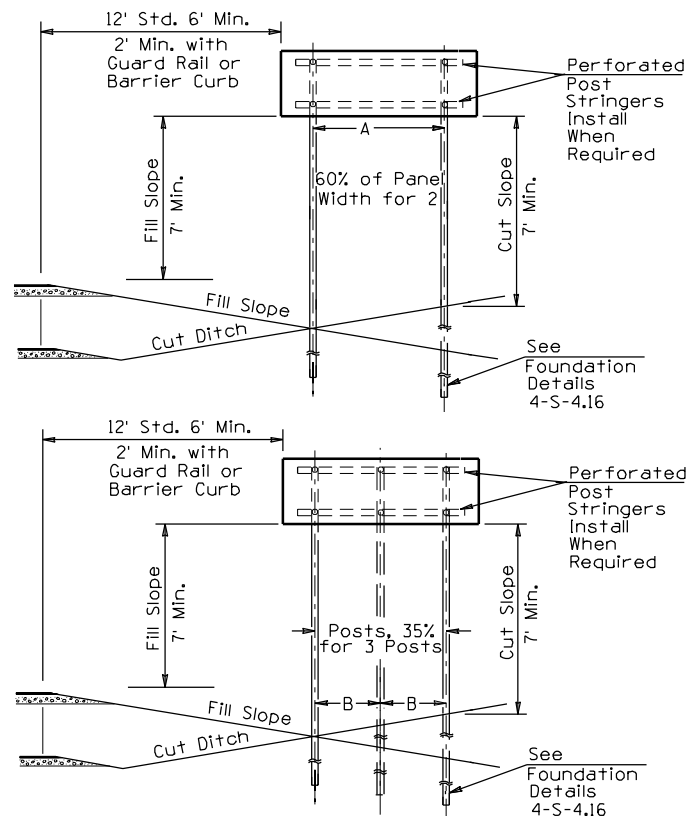

GUIDE SIGN

NOTES:

1. All flat sheet aluminum panels shall be constructed without splices in the aluminum.
2. Reflective sheeting splices are not permitted if minimum dimension of the sign is 4' or less.

DESIGN APPROVED	ARIZONA DEPARTMENT OF TRANSPORTATION INTERMODAL TRANSPORTATION DIVISION STANDARD DRAWINGS	REV. 2/02
APPROVED FOR CONSTRUCTION	OFFSETS, CLEARANCE, AND MOUNTING DETAILS FOR SQUARE TUBE POSTS	DRAWING NO. S-3

SHEET 4 OF 4
NOT TO SCALE

SIGNATURE
ON FILE